


NOTICE: THIS DRAWING HAS NOT BEEN PUBLISHED AND IS THE SOLE PROPERTY OF FLUOR. AND IS LENT TO THE BORROWER FOR THEIR CONFIDENTIAL USE ONLY, AND IN CONSIDERATION OF THE LOAN OF THIS DRAWING, THE BORROWER PROMISES AND AGREES TO RETURN IT UPON REQUEST AND AGREES THAT IT WILL NOT BE REPRODUCED, COPIED, LENT, OR OTHERWISE DISPOSED OF DIRECTLY OR INDIRECTLY, NOR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT IS FURNISHED.

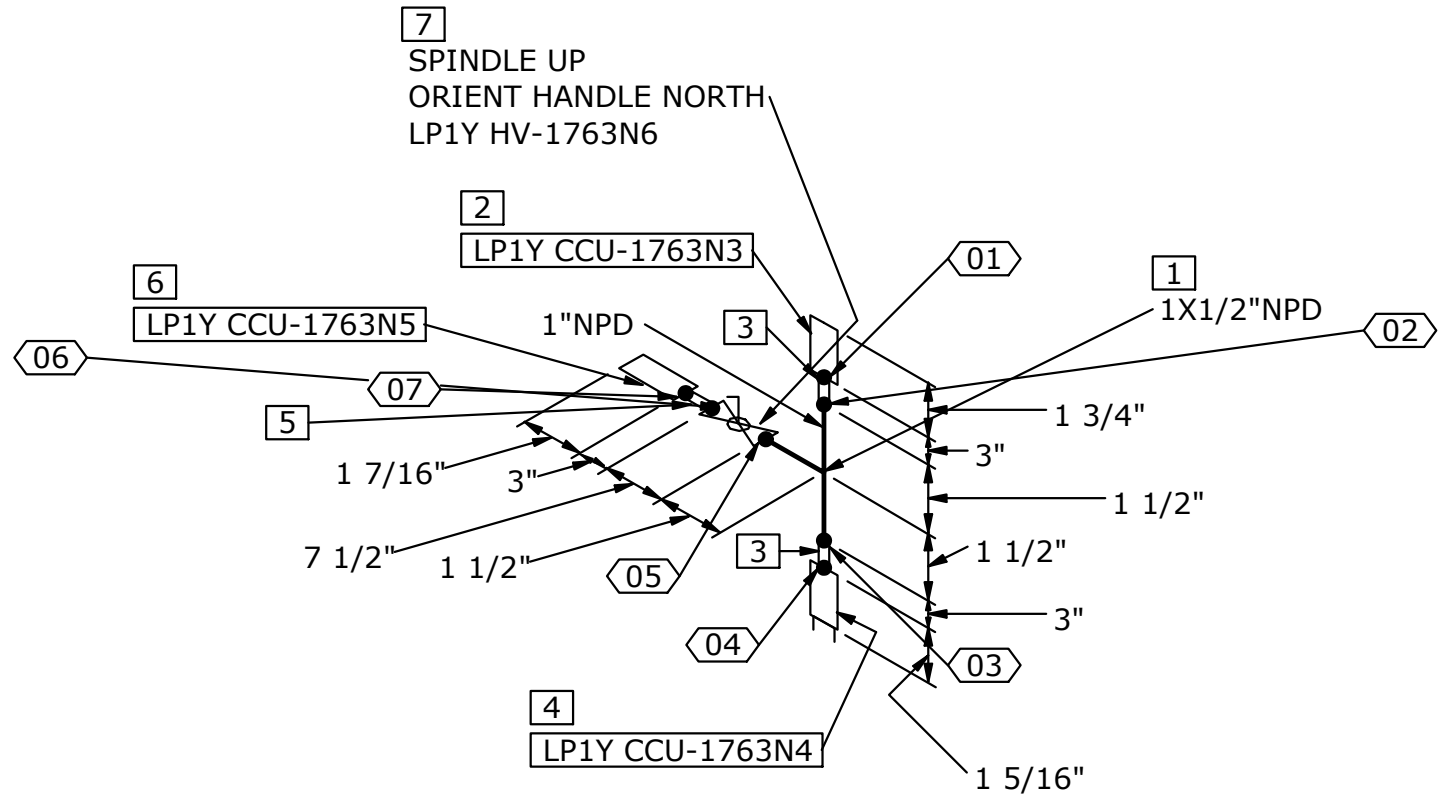

NOTE 1:
THIS SPOOL ASSEMBLY TO BE USED FOR N2 PRESSURE TRANSFER ON TFA TRUCK OFFLOADING.

- GENERAL NOTE:
- REFER TO THE PIPING LINE LIST FOR PROCESS DATA/CONDITIONS AND OTHER FABRICATION DETAILS SUCH AS TESTING, CLEANING, AND PAINTING REQUIREMENTS.
 - UNLESS OTHERWISE NOTED, ALL WELDS ARE INDICATED AS SHOP WELDS. CONTRACTOR TO DETERMINE FIELD WELDS LOCATIONS AND DOCUMENT ACCORDINGLY ON AS-BUILT RECORDS.
 - WELDS AND/OR COUPLINGS DEFINING RANDOM PIPE SPOOL LENGTHS ARE FOR REFERENCE ONLY. FINAL WELD OR COUPLING LOCATION IS TO BE DETERMINED BY THE CONTRACTOR.
 - THE MECHANICAL CONTRACTOR TO FIELD VERIFY INTERFACE POINTS BETWEEN EQUIPMENT & PLUMBING FIXTURES IN 3rd FIX (3F SERIES CWP) AND YS YARD STICK BUILT (YS SERIES CWP EQUIPMENT CONNECTIONS) ISOMETRICS PRIOR TO FABRICATION.
 - THE MECHANICAL CONTRACTOR IS TO VERIFY ALL DIMENSIONAL DATA WITH ACTUAL FIELD CONDITIONS PRIOR TO INSTALLATION OF THE SYSTEM.
 - PIPE SUPPORTS SHALL BE FURNISHED AND INSTALLED IN ACCORDANCE WITH THIS DRAWING AND SPECIFICATION LP100-250-EMS-15110. MECHANICAL CONTRACTOR SHALL PROVIDE TEMPORARY SUPPORTS AS REQUIRED TO AID PRESSURE TESTING, INSTALLATION ETC.
 - PIPE SUPPORTS INDICATED ON THE DRAWING MAY BE PART OF AN ASSEMBLY ON SEVERAL ISOMETRICS. REFER TO THE 3D MODEL FOR THE COMPLETE PIPE SUPPORT ASSEMBLY.
 - MECHANICAL CONTRACTOR SHALL NOTE ALL DESIGN CHANGES ON THIS DRAWING AND RETURN IT TO THE CONSTRUCTION WPO FOR AS-BUILT RECORDS.
 - THE BILL OF MATERIAL IS FOR REFERENCE ONLY.
 - SLOPE EQUIVALENTS: 1:27 = 7/16" PER FT, 1:96 = 1/8" PER FT, 1:120 = 1/10" PER FT, 1:192 = 1/16" PER FT, 1:480 = 1/40" PER FT.

NODE:		TFS
BUILDING NO:		Y
CWP NO:		TFS00E015YSPP
MODULE NO:		N/A
SERVICE CODE:		N2
PIPE SCHEDULE:		332
INSULATION CODE:		NI
TRACING TYPE:		NT
ELASTOMER:		P
HYGIENIC:	NO	IMPACT: YES

BILL OF MATERIALS

PT NO	DESCRIPTION	NPD (IN)	CMDTY CODE	QTY
1	TEE RED SCH 10S HASTELLOY C22 B366-W	1X1/2	5469758L	1
2	HOSE CONNECTION HASTELLOY BW ADAPTER CAMLOCK WITH DUST CAP	1	LP1Y CCU-1763N3	1
3	NIPPLE SCH 10S HASTELLOY C22 BBE 3" LONG	1	5542501L	2
4	HOSE CONNECTION HASTELLOY BW COUPLER CAMLOCK WITH DUST PLUG	1	LP1Y CCU-1763N4	1
5	NIPPLE SCH 10S HASTELLOY C22 BBE 3" LONG	1/2	5542501L	1
6	HOSE CONNECTION HASTELLOY BW ADAPTER CAMLOCK WITH DUST CAP	1/2	LP1Y CCU-1763N5	1
7	BALL CL300 BW HASTELLOY C22 SCH 10S, EXTD BON, HNDL OP FS	1/2	5304151L6	1

0	ISSUED FOR CONSTRUCTION	02-MAR-2026	IRN	CTK	RRS	N/A	MKF
REV. NO.	DESCRIPTION	DATE	DRWN	CHK	STR	INSTR/PRCS	QC
		 EFDEE Engineering PC PROJECT NO. B1LG					
LINE NUMBER		LP1Y 1" HAST N2 (332) P 176304					
REFERENCE P&ID NUMBER		ISOMETRIC DRAWING NUMBER		REV			
LP1Y-DI-00000176		LP1Y-N2-176304-01		0			